


## Technical Data

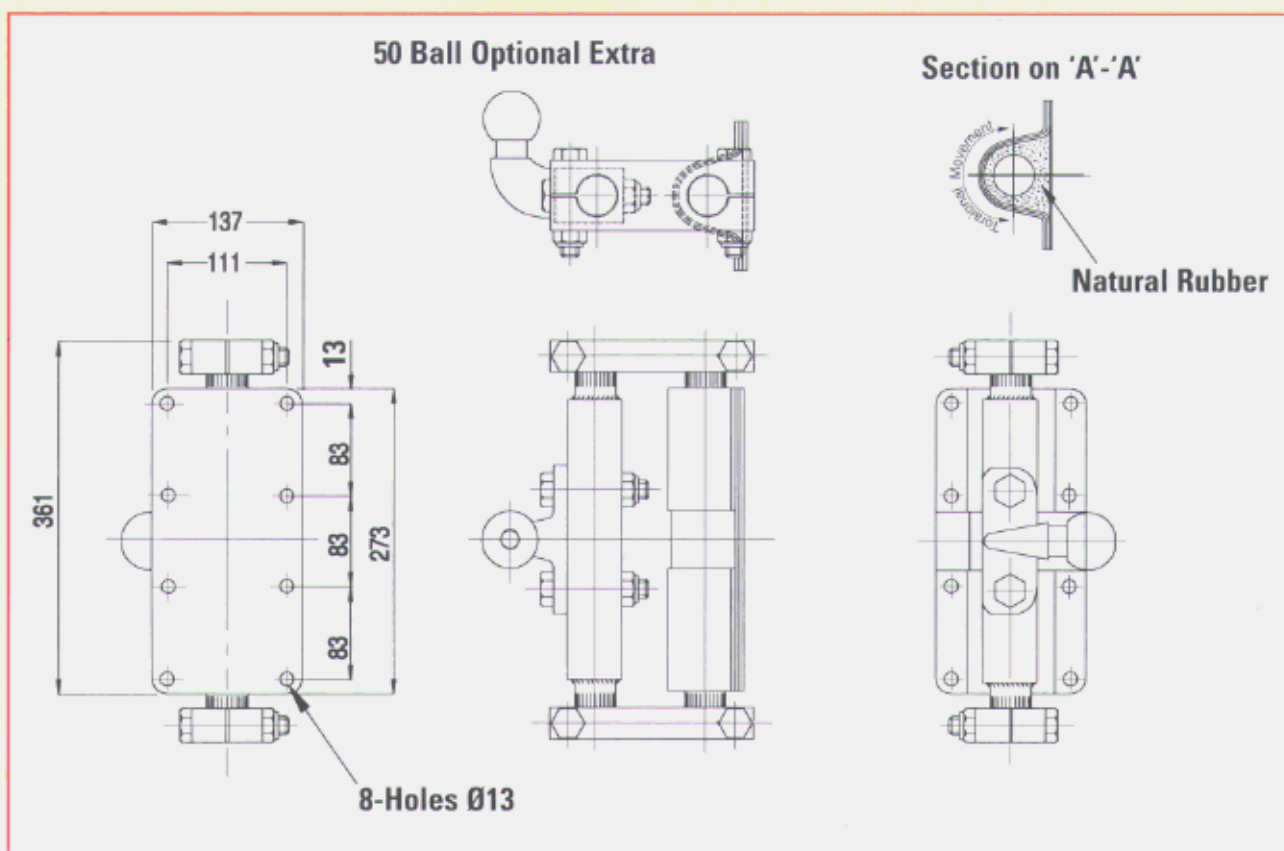

In the Flexitow mounting, the centre shaft is extended at both ends of the housing and splined. Two arms, similar to the suspension swinging arm, connect it to a cross member, also with splined ends, that supports a standard 3500kg tow ball.

This arrangement allows for 15cm (six inches) of adjustment for the ball height and the double bonded rubber suspension unit insulates the towed unit from shock and vibration. The normal suspension housing is reinforced with additional saddle pressings through which it is bolted to the chassis or drop plate.

The **FLEXITOW** unit is currently only available in one size, which is 360mm overall width with a base plate that measures 273 x 137mm and has 8 x 13mm mounting holes.

Peak Trailers Limited reserve the right to alter prices and specifications in line with costs and material availability.



**Peak Trailers Limited**

Waterloo Industrial Estate, Waterloo Road, Bidford-on-Avon, Warwickshire, B50 4JH  
Telephone: 01789 778041 Facsimile: 01789 490331 IDD: 44 789  
e-mail: sales@peaktrailers.com Website: www.peaktrailers.com

